


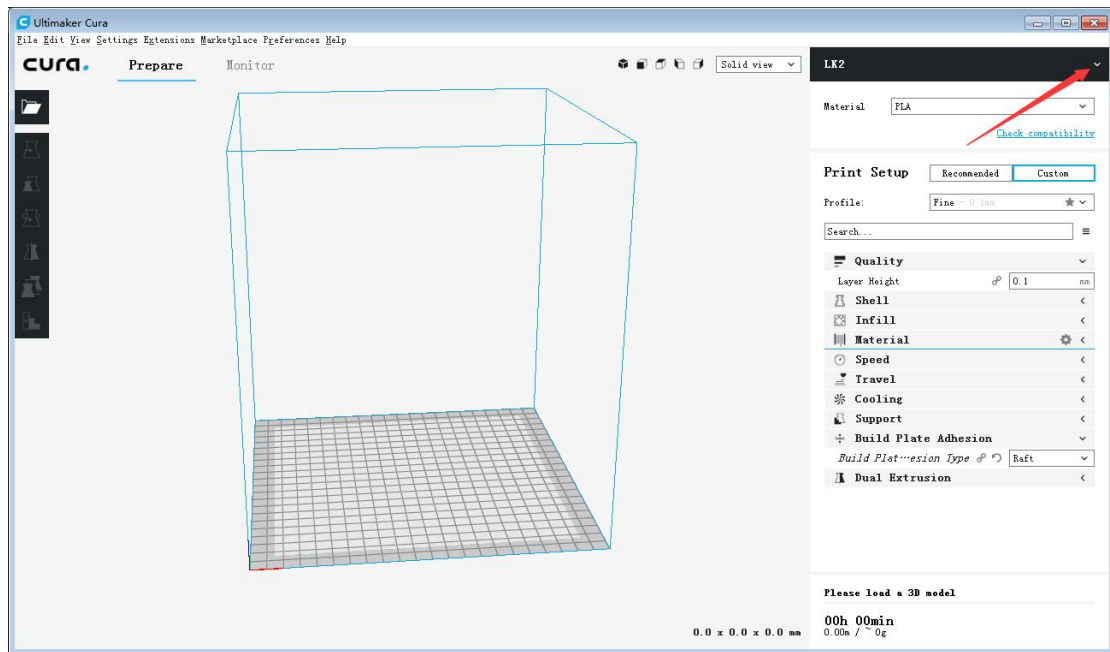




When Cura3.6.0 is installed, open the main interface.


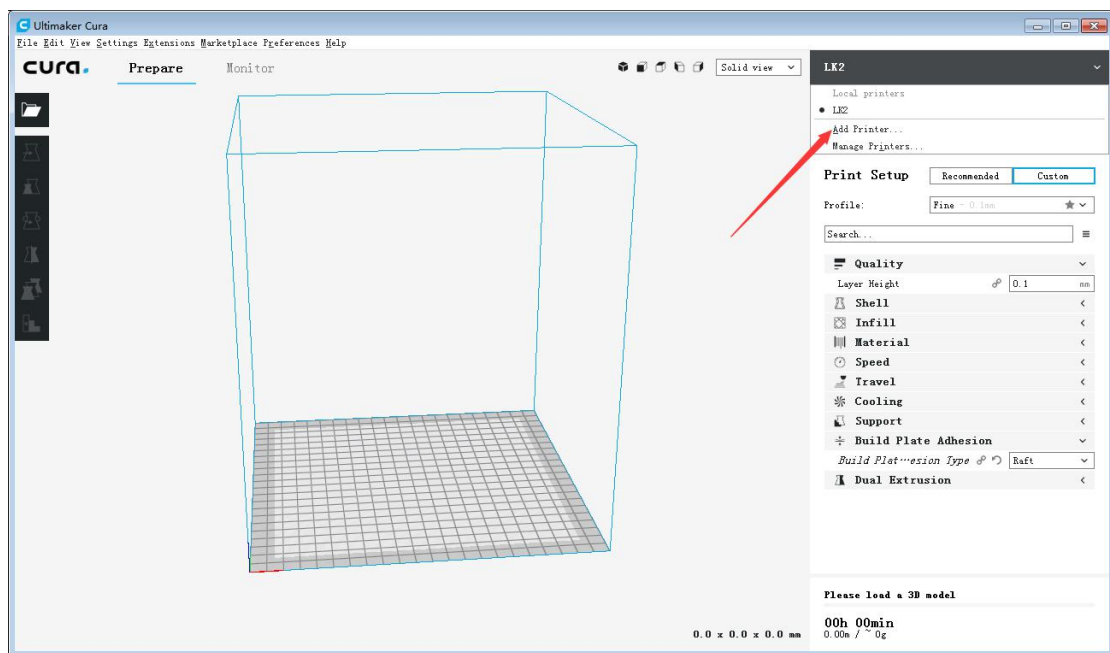



Click on the top right corner to add a new machine model.

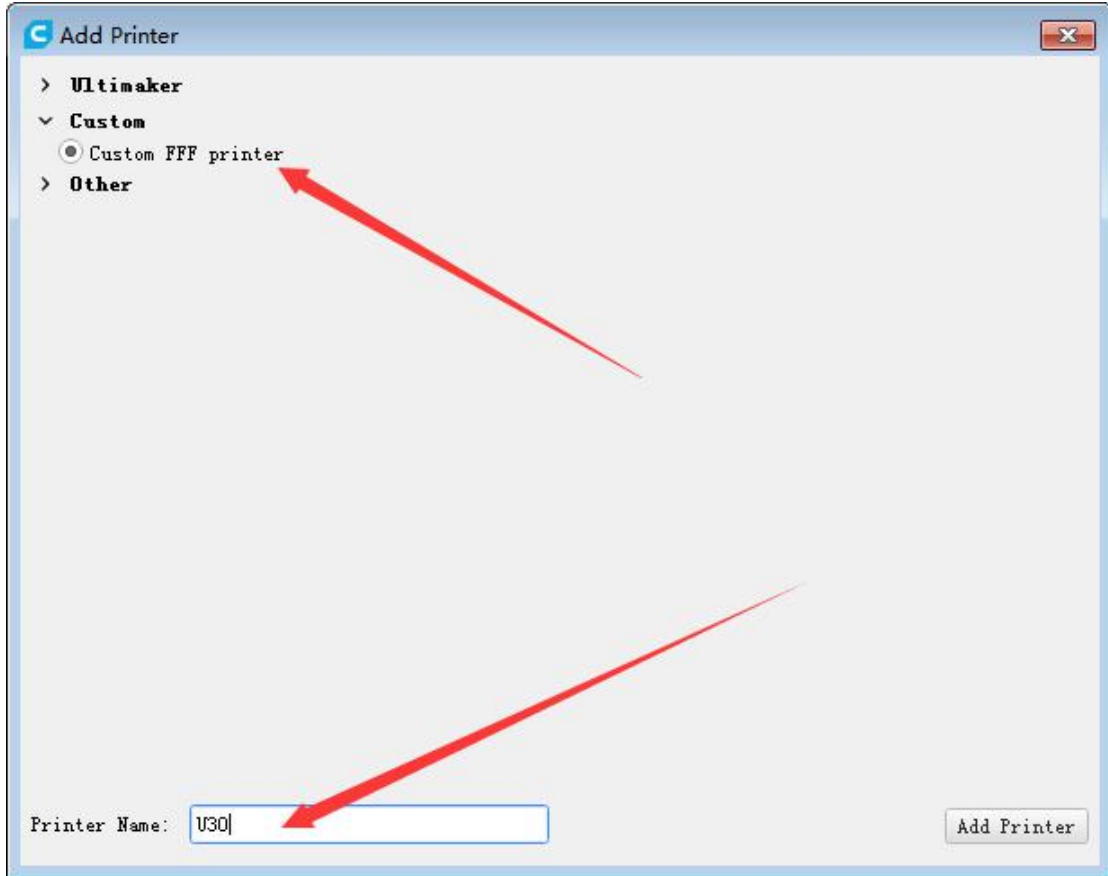

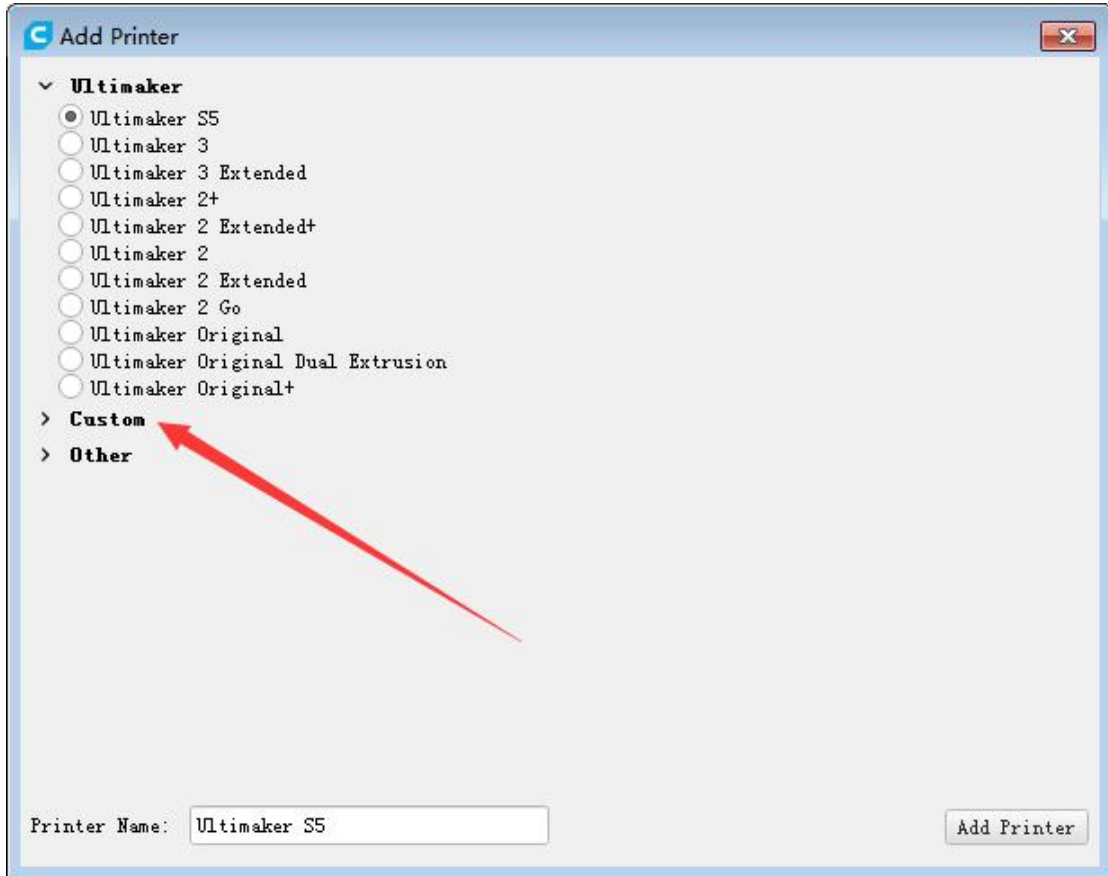

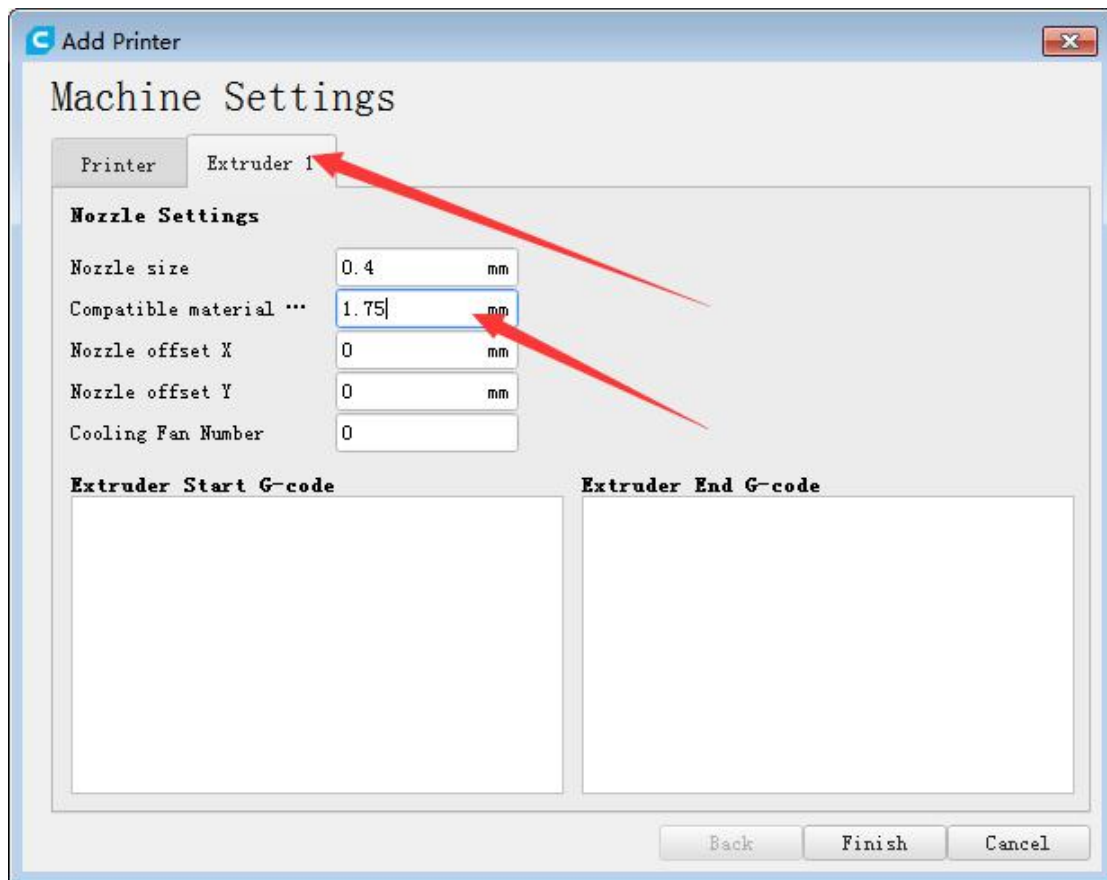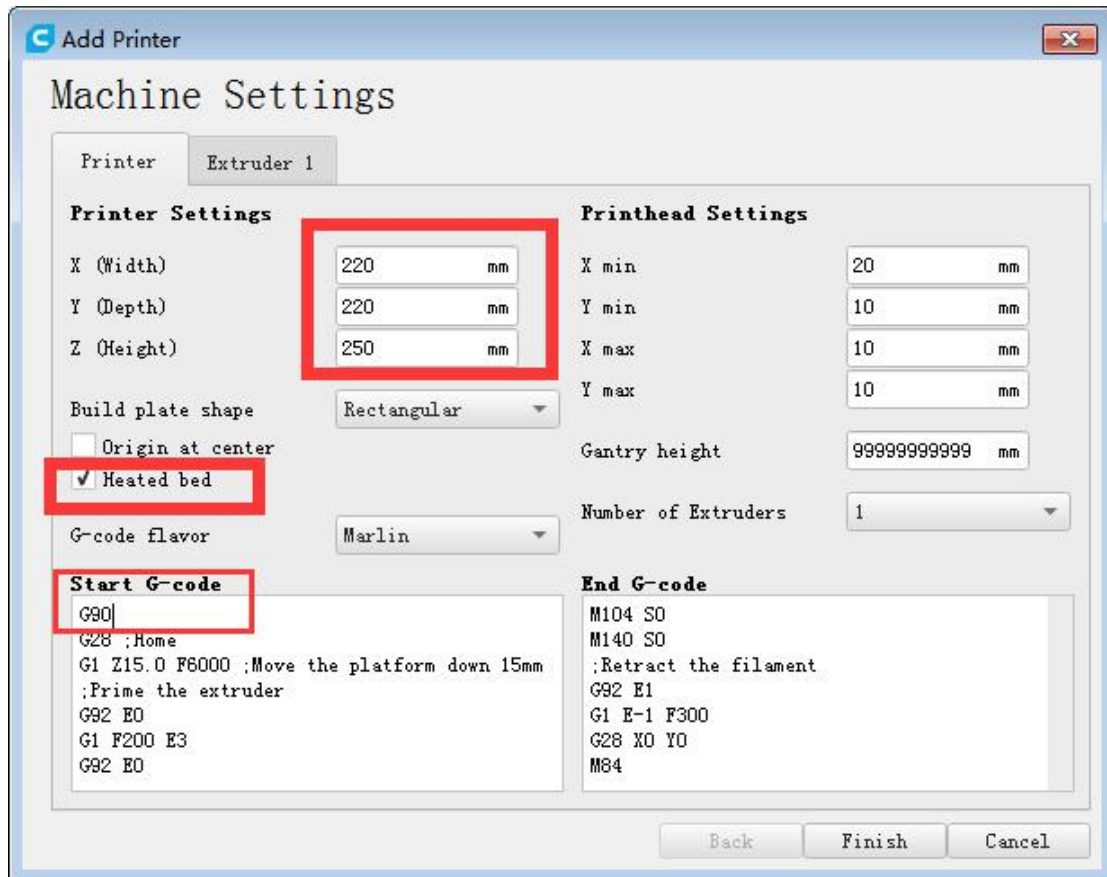

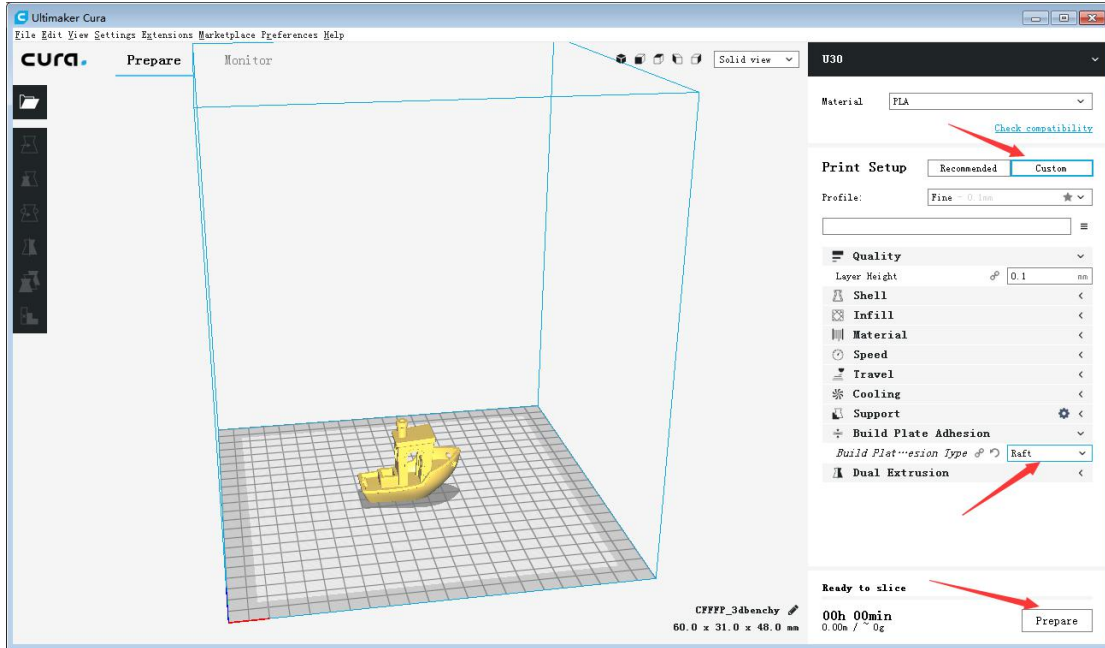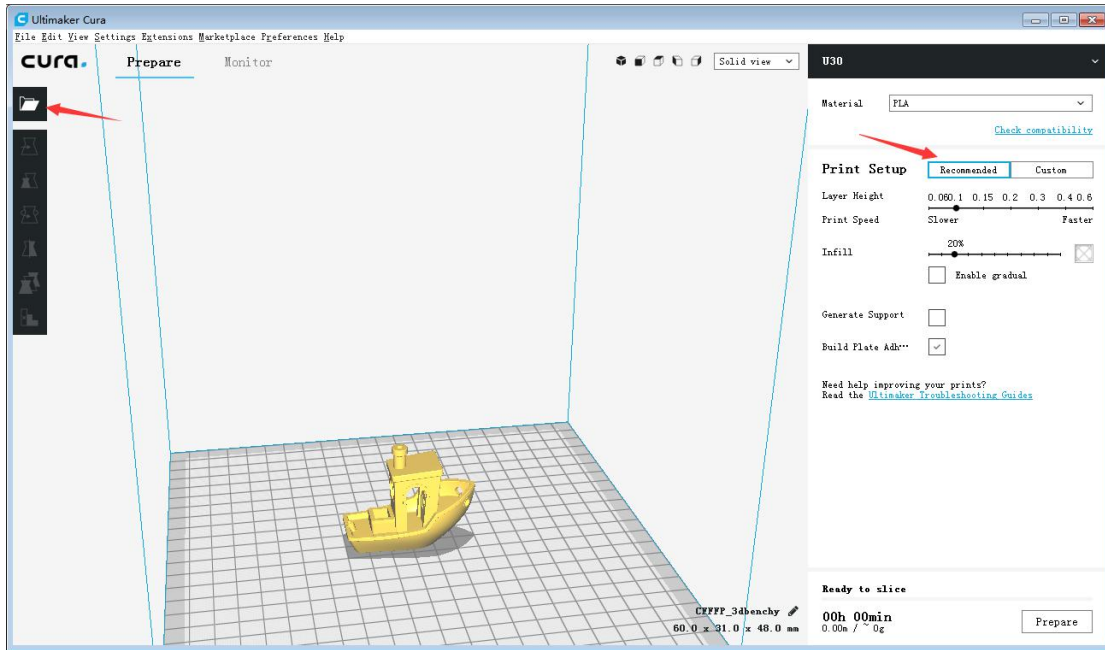

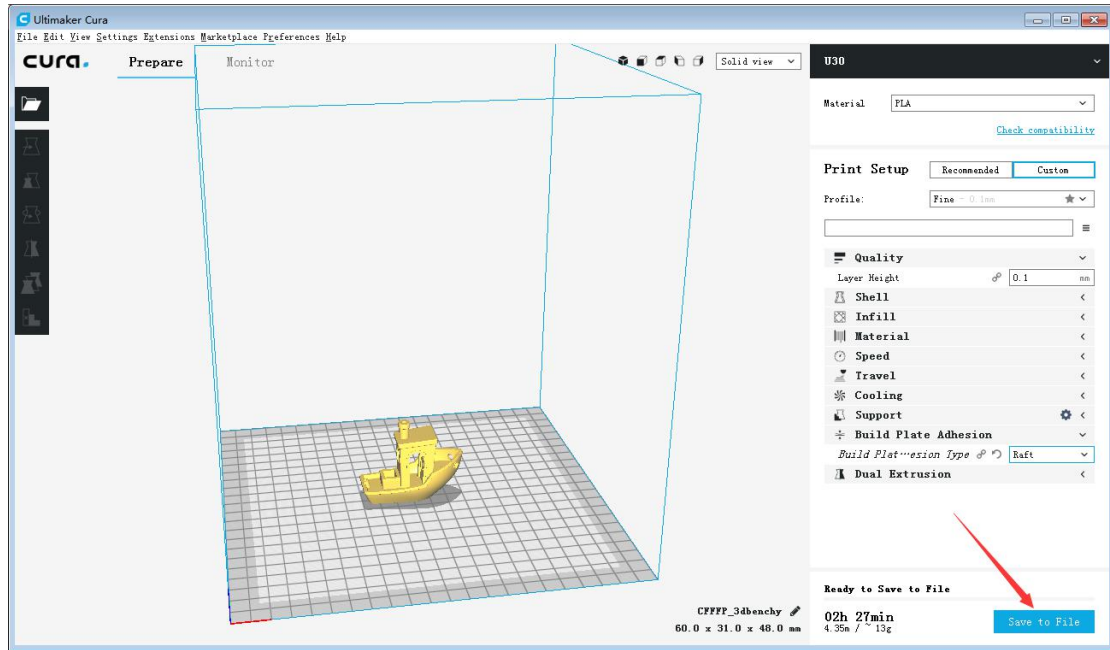

The PLA default configuration parameters of Cura3.6.0 are reasonable, so they can be used without modification.

Note: Cura3.6 slice software online printing function is not very compatible with U20, if you want to print online, please use Cura15.04 version of SD card.